



INSTRUCTION MANUAL

AIRBRUSH COMPRESSOR FUSION 30

Thanks for purchasing our airbrush compressor. This compressor has been designed for users who need high quality spraying effects. Please read this Instruction Manual carefully and thoroughly before operating the tool for best performance.



Application Field:


The compressor is suitable for makeup, tanning, tattoo, hobbies/model, fingernail painting, Bakery and so on.

Specification:

- Voltage: 230V
- Power: 1/6 HP
- Auto stop pressure: 45PSI (3.1bar) Auto start pressure: 30PSI (2.1bar)
- Pressure adjustable range: 0-3 BAR
- Air flow: 20~23L/Min
- Air tank: 0.3L
- Noise Level: 47 db
- Dimension: 160X150X175 MM
- N.W. 2.7 KG
- Air outlet: 1/8" BSP (Other specification available)

Feature:

- Oil-less Piston type
- Working pressure adjustor
- Continuous working
- Thermally overload protected
- Air inlet filter and air outlet filter
- Auto stop Function
- Pressure gauge
- Small air tank inside
- Light on/off switch
- Airbrush holder

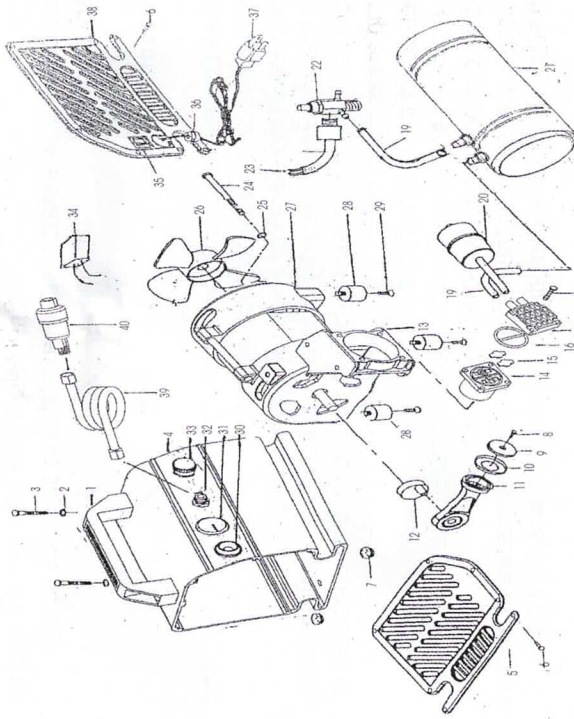

INDEX	DESCRIPTION	QUAN	INDEX	DESCRIPTION	QUAN	INDEX	DESCRIPTION	QUAN
#1	Handle	1	#15	In-out valve	2	#29	Set screw	4
#2	Washer	2	#16	O-ring	1	#30	Airbrush holder	1
#3	Set screw	2	#17	Cylinder head	1	#31	Pressure gauge	1
#4	Body	1	#18	Set screw	4	#32	Air outlet	1
#5	Rear body lid	1	#19	Air outlet hose	2	#33	Pressure regulator	1
#6	Set screw	14	#20	Air in filter	1	#34	Capacitance	1
#7	Rubber stand	4	#21	Air tank	1	#35	Light on/off switch	1
#8	Set screw	1	#22	Regulator valve	1	#36	Cable protector	1
#9	Lock plate	1	#23	Pressure switch	1	#37	Plug	1
#10	Compression ring	1	#24	Set screw	2	#38	Front body lid	1
#11	Connecting rod	1	#25	Washer	2	#39	Air hose	1
#12	Counterweight	1	#26	Cooling fan	1	#40	Mini filter	1
#13	Prop	1	#27	Motor	1			
#14	Cylinder block	1	#28	Rubber base	4			

Accessory inside: 1 pcs 1.7M air hose; 1 pcs mini air filter.


Hose Connections:

The connections between compressor and hose connector are not always airtight. 100% air tightness is, however, only absolutely essential in the case of automatic models. Teflon tape can be used to prevent leakage. This elastic tape is available in all stores selling sanitary products.

Application Caution:

1. Please choose the compressor accordingly. Voltage frequency and plug need to be suitable for local market.
2. Do not touch the electrical source with a wet hand.
3. Use the compressor in a dry, clean and adequately ventilated area.
4. Avoid using the compressor in high temperature, high corrosive, or damp areas.
5. Keep out of the reach of children.
6. Do not insert any eyewinker into the compressor.
7. Ensure compressor is turned off when not in use.
8. After use, please clean the airbrush, empty the moisture in air hose and store all tools in a cool, dry and ventilated place.

Air Compressor Structure:

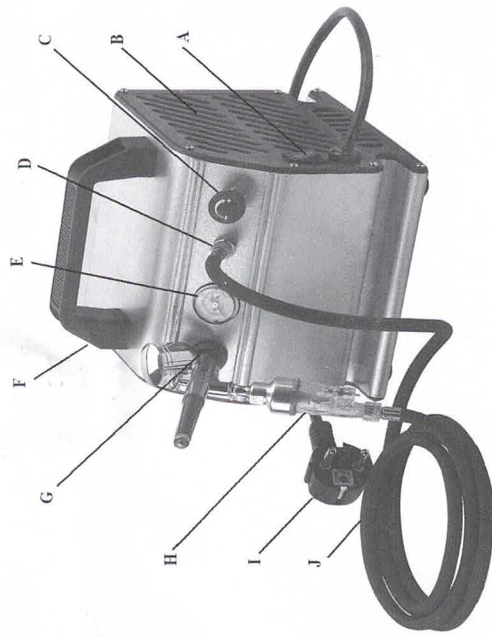

(the picture is only for reference; the specific kind will prevail)

- A. On/Off switch
- B. Air tank inside
- C. Pressure adjustment knob
- D. Hose connector
- E. Pressure gauge
- F. Handle
- G. Airbrush holder
- H. Mini filter
- I. Power plug
- J. Air hose